



COMBiLiFT

Long Load Material Handling Solution

C5000 & C6000

making short work of long loads



forward/reverse mode



carousel mode



sideward mode



three machines in one


> counterbalance forklift > sideloader > aisle truck

www.COMBiLiFT.COM



SPECIFICATIONS

Models C5000 & C6000

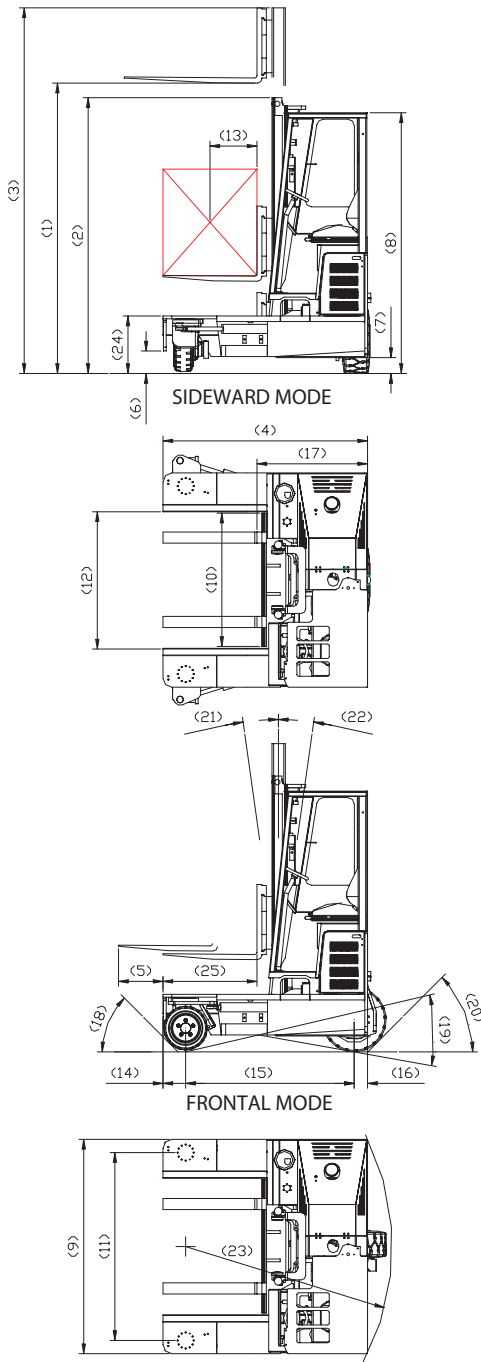

REF	DESCRIPTION	C5000	C6000
1a	Max. Lift Height		159"
1b	Free Lift Height		0"
2	Height Mast Closed		104"
3	Max.(Mast raised)		188"
4	Overall Length	75"	89"
5	Mast Travel	35"	49"
6	Ground Clearance Under Mast		6"
7	Ground Clearance to Centre of Wheelbase		5"
8	Height Over Cab		92"
9	Width		76"
10	Outside Spread of Fork Arms		47"
11	Track Front		68"
12	Frame Opening		48"
13	Load Centre Distance	18"	24"
14	Overhang Front		8"
15	Wheel Base	60"	74"
16	Overhang Back		7"
17	Length From Face of Fork		43½"
18	Approach Angle		45°
19	Ramp Angle		17°
20	Departure Angle		45°
21	Forward Tilt		2°
22	Backward Tilt		4°
23	Minimum Outside Radius	60"	64"
24	Platform Height		19 ½"
25	Platform Length	31 ½"	45 ¼"
A	Capacity	5000 lbs	6000 lbs
B	Unladen Weight	10,350 lbs	10,800 lbs
C	Maximum Ground Speed		9 mph
D	Gradability		10%
E	VW Engine (Water Cooled)		65 HP
F	Electric's		12 Volt
G	Fork Section 2 x 5 x	31 ½"	45 ¼"
H	16 x 7 – 10.5 Front Tyre (Solid Rubber)		OD 16"/Width 7"
I	23 x 10 - 12 Rear Tyre (Super Elastic)		OD 23"/Width 10"
J	Standard Colour		Green & Grey
K	Suspension Seat		KAB Model 21 I


FEATURES INCLUDE:

- Rubber Mounted Half Cabin with Top, Front, Side, and rear Glass
- Multi – Direction Operation
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- 4 Way lever Positioning of Wheels

Combilift Ltd., Gallinagh,
Monaghan, Ireland
Tel: +353 47 80500
Fax: +353 47 80501
info@combilift.com

COMBILIFT USA
303 Concord Street
Greensboro,
North Carolina 27406
Tel: 1877 Combi 56

www.COMBILIFT.COM

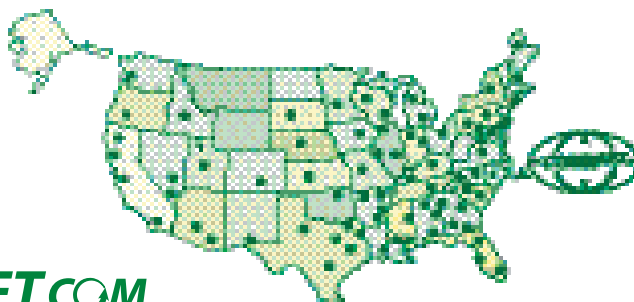

Distributed By