

C-SERIES C22,000 Diesel

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBILIFT
LIFTING INNOVATION




combilift.com



C-SERIES

C22,000 Diesel

FRONTAL MODE

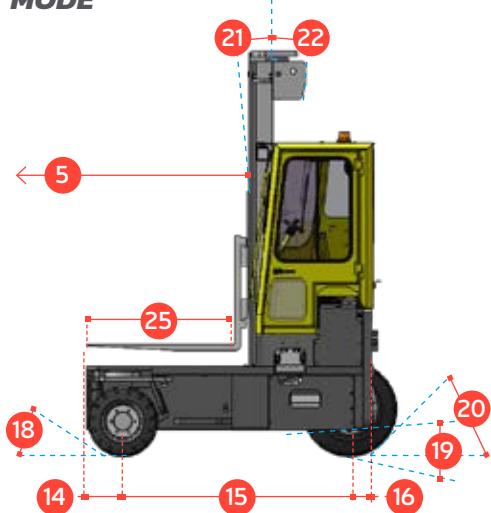


SIDEWARD MODE

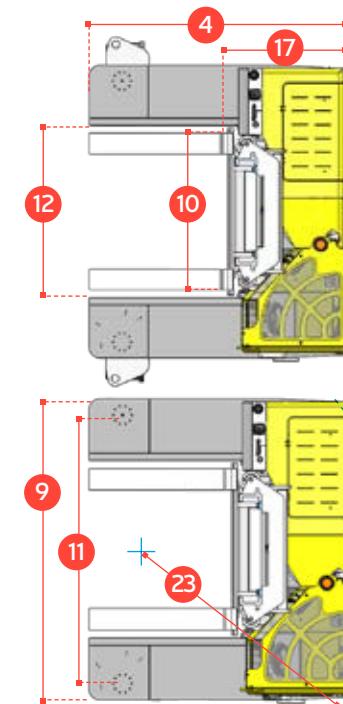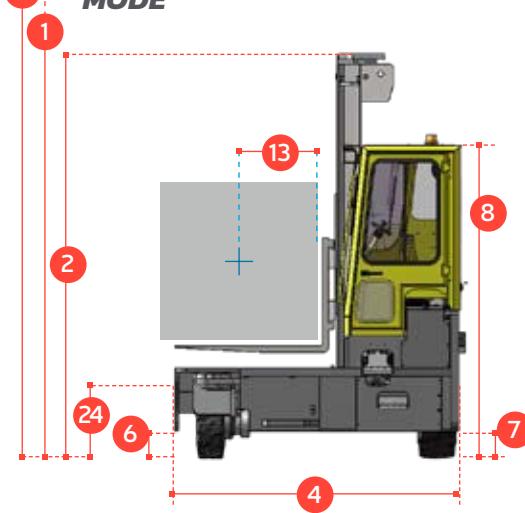

REF.	DESCRIPTION	C22,000
1a	Max. Lift Height	16 1/2"
1b	Free Lift Height	0"
2	Height Mast Closed	136"
3	Max. Mast Raised	228 1/2"
4	Overall Length	121"
5	Mast travel	68 1/4"
6	Ground Clearance Under Mast	11 1/2"
7	Ground Clearance to Center of Wheelbase	6 1/2"
8	Height Over Cab (without work lights)	106 1/4"
9	Width	110 1/4"
10	Outside Spread of Fork Arms	63"
11	Track Front	98 1/2"
12	Frame Opening	65"
13	Load Center Distance	24"
14	Overhang Front	12 1/4"
15	Wheelbase	100 3/4"
16	Overhang Back	8"
17	Length from Face of Fork	54 1/2"
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	122 1/4"
24	Platform Height	30 1/2"
25	Platform Length	66 1/2"

Multi-Directional

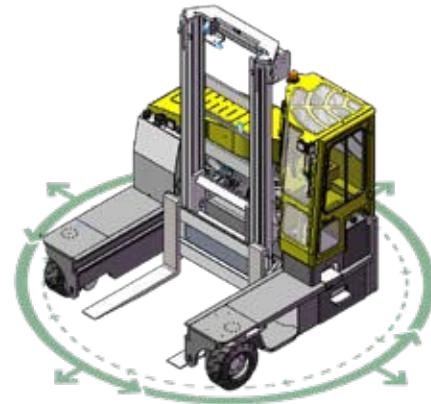

Features Include:

- Rubber Mounted Half Open Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed by:

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

303 CONCORD STREET,
GREENSBORO,
NORTH CAROLINA 27406

TOLL FREE: 1-877 COMBI 56
TEL: 336-378-8884
INFO@COMBILIFT.COM

combilift.com