

COMBi-CLL

LOG LOADER

LOAD LOGS INTO A CONTAINER IN 6 MINUTES.

The Logs are pre-loaded into the robust, 40' long high-sided Tub. The patented push-pull mechanism powers the loaded Tub into the container. Once inside, the Hatch is closed to hold the logs securely in place, and the Tub is retracted.



COMBiLiFT
LiFTING INNOVATION



- 65,000 lbs. Capacity
- 6 Minute Load Time
- Increase Safety
- Reduced equipment

- Eliminate container damage
- Reduced truck waiting times

THE COST EFFECTIVE SOLUTION FOR LOADING LOGS INTO CONTAINERS



REAR RACK

Ensure the logs do not extend beyond the tub



STURDY HATCH DOOR

Pilot -Operated Check Valves on the Cylinders ensure the Hatch Door is positively locked





HEAVY DUTY TUB

With reinforced Base & Side Walls give structural rigidity and eliminate risk of container wall damage

COMBi-CLL

LOG LOADER

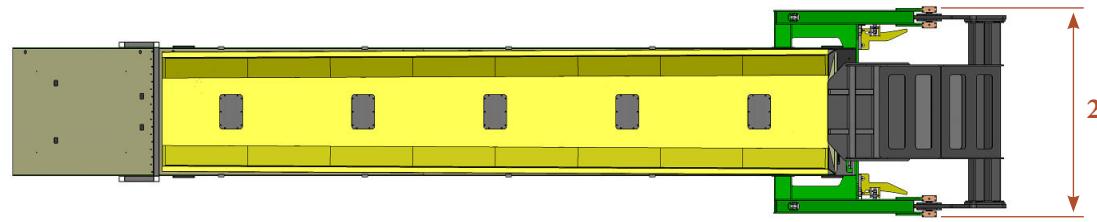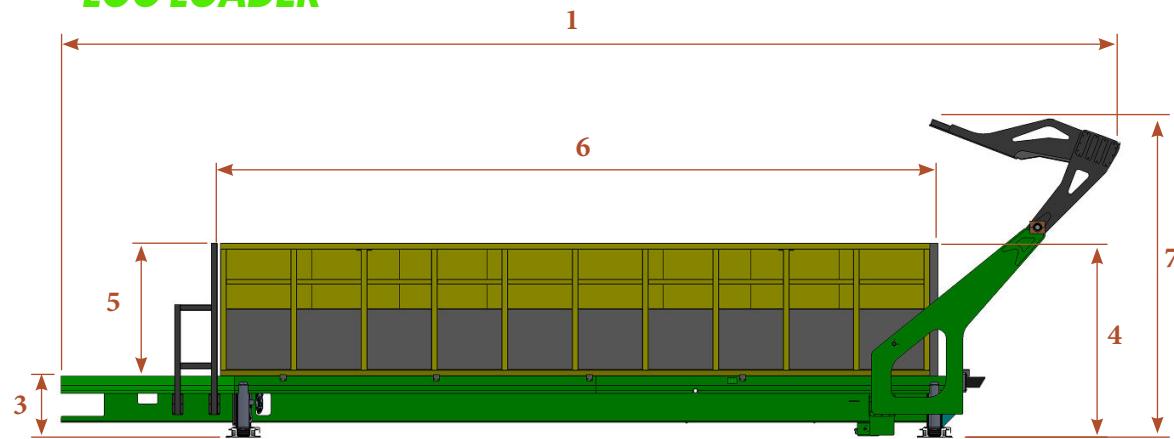

| DESCRIPTION | | COMBi-CLL SLIP-SHEET (IMPERIAL) |
|-------------|---|---------------------------------|
| 1 | OVERALL LENGTH | 680 " |
| 2 | WIDTH | 143 " |
| 3 | SHEET HEIGHT | 40 - 60 " |
| 4 | HEIGHT FROM GROUND TO TOP OF TUB | 125-145 " |
| 5 | TUB HEIGHT | 84 " |
| 6 | TUB LENGTH | 456 " |
| 7 | OVERAL HEIGHT | 205 - 225 " |
| A | CAPACITY | 65,000 LBS |
| B | MOTOR | 50 HP |
| C | POWER | 480 V, 3-PHASE, 100 AMP |
| D | HYDRAULIC STROKE MECHANISM | 479 " |
| E | CONTAINER SIZES: FITS STANDARD & HIGH CUBE | 20'/30'/40' |
| F | SLIP SHEET MATERIAL | HARDOX |



Logs are preloaded into the
Tub & Container attached

Loaded Tub is powered into the Container

Loaded Tub securely.
inside Container.

Hatch Closes Down

Hatch Locks Down & Tub
Powers Out

Hatch Opens Up & loaded
Container is Detached.