

COMBi-CBE 6000


The innovative Combi-CBE is designed to increase productivity, improve safety and help increase your storage capacity both indoors & outdoors.

COMBiLiFT
LiFTING INNOVATION






COMBi-CBE 6000

FRONTAL MODE

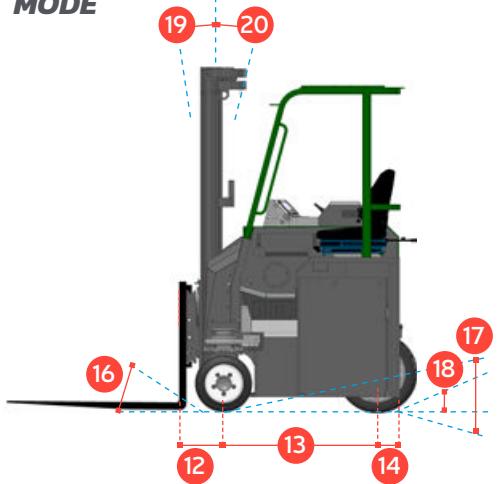

SIDEWARD MODE

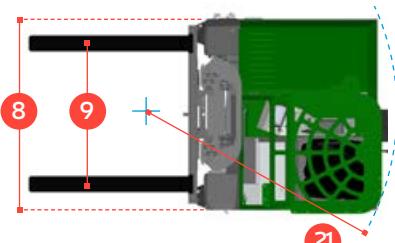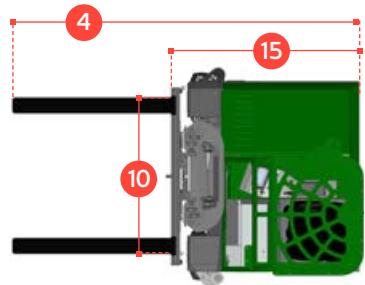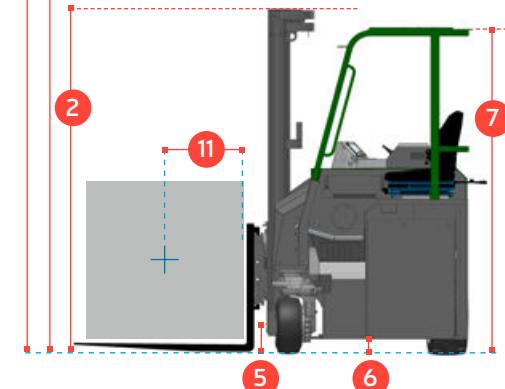

REF.	DESCRIPTION	STD.	OPTION
1a	Standard Lift Height	157"	193" 216" 236"
1b	Free Lift Height	0"	52" 60" 67"
2	Height Mast Closed	105"	88" 96" 103"
3	Max. (Mast raised)	190"	228" 251" 270"
4	Overall Length		100" / 106"
5	Ground Clearance Under Mast		5"
6	Ground Clearance to Wheelbase Center		4"
7	Height of Overhead Guard		88½"
8	Width		59"
9	Outside Spread of Fork Arms		52½"
10	Track Front		52"
11	Load Center Distance		24"
12	Overhang Front		11"
13	Wheel Base		42"
14	Overhang Back		6" / 9"
15	Length From Face of Fork		59" / 62"
16	Approach Angle		30°
17	Ramp Angle		15°
18	Departure Angle		30°
19	Forward Tilt		3°
20	Backward Tilt		5°
21	Minimum Outside Radius		55"

Multi-Directional



Features Include:

- +/- 4" side shift
- Load sensing steering
- 4-Way lever positioning of wheels
- System Communication via CAN-BUS
- Multi-directional operation
- 2 Wheel Electric Drive
- Powered by AC Technology

Distributed by:

Protected by Design Registration Copyright: European Community No.: 000725668-0001|US No.: D579, 624| Canadian No.: 123292|Australian No.: 318370| Russian Federation No.: 70814 |Korean No.: 30-0516087| Japanese No.: 1330896|Taiwan No.: D126056| Chinese No.: ZL200730329732.6

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.