

COMBi-FSE

10,000 - 12,000 lbs

The electric 4 wheel Sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBiLiFT


LiFTING INNOVATION




COMBi-FSE

10,000 - 12,000 lbs


SIDE VIEW

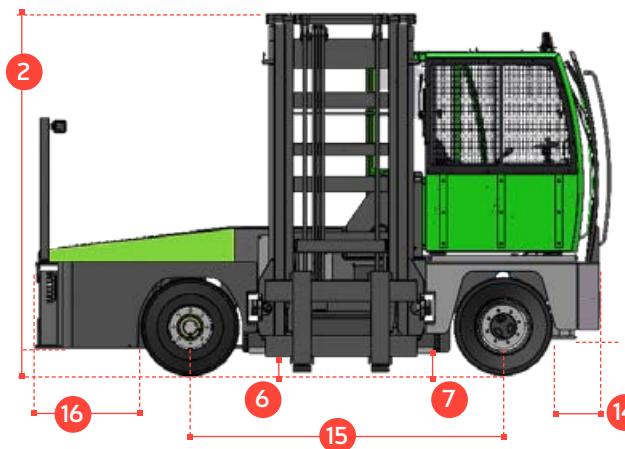


FRONT VIEW

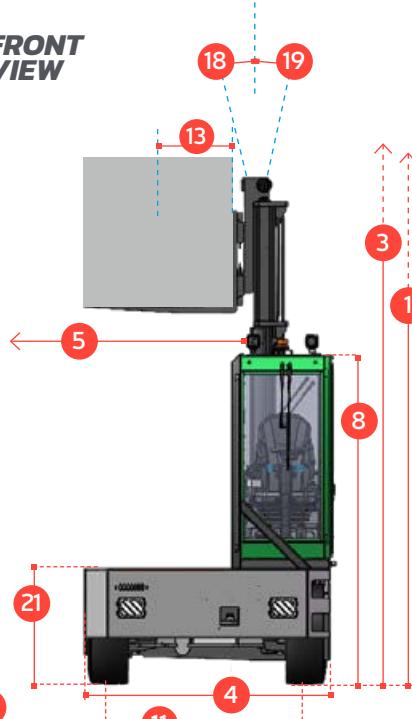

OVERHEAD VIEW

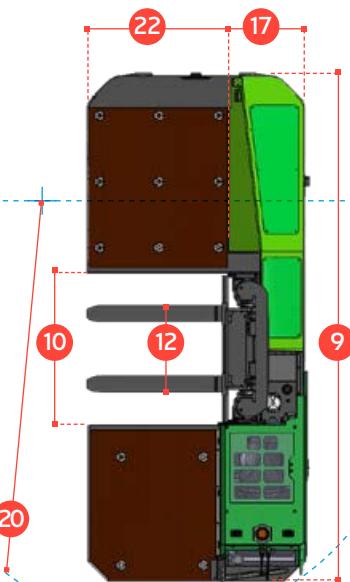

REF.	DESCRIPTION	10000 FSE	12000 FSE
1a	Standard Lift Height	159"	
1b	Freelift Height	0	
2	Height Mast Closed	119 1/2"	
3	Max. (Mast raised)	202 3/4"	
4	Overall Width	78 3/4"	
5	Mast Travel	51 3/4"	
6	Ground Clearance Under Mast	12"	
7	Ground Clearance to Center of Wheelbase	9 1/2"	
8	Height Over Cab (Without work lights)	107 1/2"	
9	Overall Length	185"	
10	Frame Opening	55"	
11	Track	63"	
12	Outside Spread of Fork Arms	49 1/2"	
13	Load Center Distance	23 3/4"	
14	Overhang Front	31 1/2"	
15	Wheelbase	102 1/2"	
16	Overhang Back	47 1/4"	
17	Length From Face of Fork	31 1/2"	
18	Forward Tilt	3°	
19	Backward Tilt	5°	
20	Minimum Outside Radius	165 1/4"	
21	Platform Height	37 1/2"	
22	Platform Length	47 1/2"	
A	Capacity	10000 lbs.	12000 lbs.
B	Unladen Weight	24250 lbs.	26455 lbs.
C	Maximum Ground Speed	20km/h	
D	Gradeability	15%	
E	Battery Capacity	80 kWh	96 kWh
F	Cab Electrics	12V	
G	Fork Section 50mm x 200mm x	47"	
H	Tyre Size	14" / 2 1/2 " - 1/2 "	
I	Standard Color	Green & Grey	
J	Suspension Seat	BE-GE Air Suspension Seat	

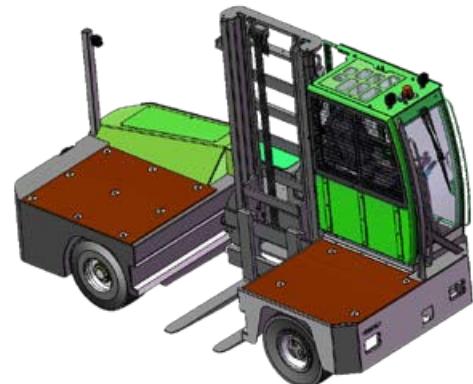

Features Include:

- Rubber mounted cabin
- 2 Wheel Steer
- 2 Wheel Drive
- Load Sensing Steering
- Tilting Chassis
- AC Motor Technology

Distributed by:

Continuous traction managed by steer angle
- Patent Pending, Application no. GB2207946.1

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.