

COMBi-LR



Live Receiving Model

COMBiLiFT
LIFTING INNOVATION

The Combi-LR is based on the highly successful and reliable C-series multidirectional forklifts. The offset driving position provides the ideal view of the cage while a very small turning radius makes for excellent maneuverability.



COMBi-LR

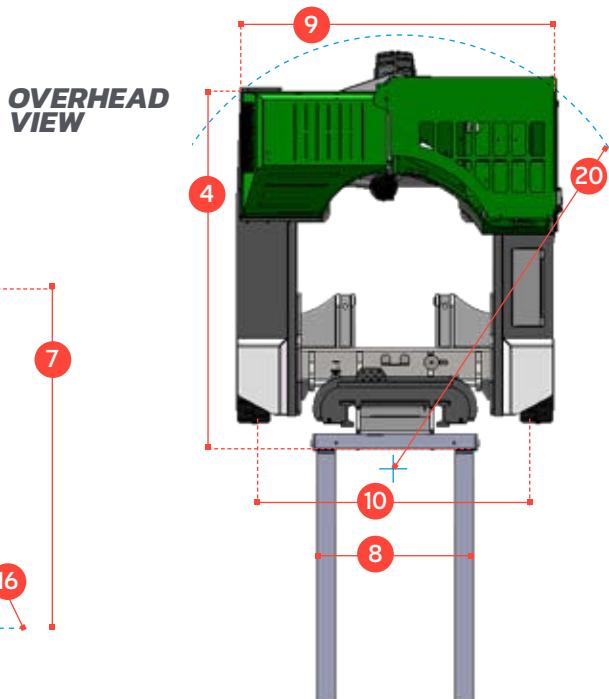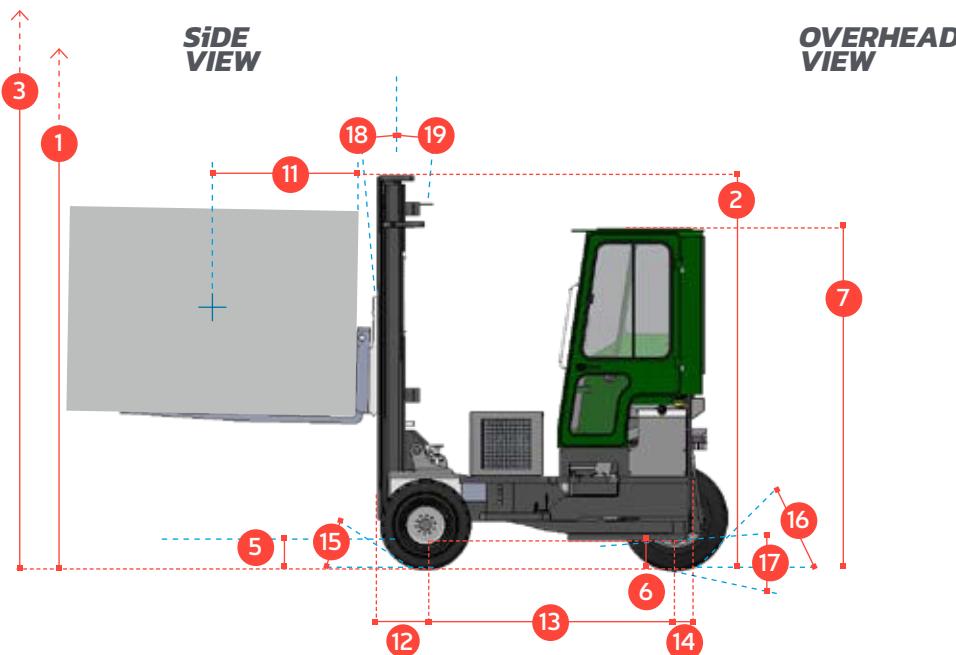

REF.	DESCRIPTION	STANDARD
1a	Max. Lift Height	127"
1b	Freelift Height	0"
2	Height Mast Closed	101½"
3	Max. (Mast raised)	171¾"
4	Length From Face of Fork	103¼"
5	Ground Clearance Under Mast	11"
6	Ground Clearance to Center of Wheelbase	10½"
7	Height Over Cab (Without work lights)	102"
8	Outside Spread of Fork Arms	39"
9	Width	88"
10	Track Front	78½"
11	Load Center Distance	48"
12	Overhang Front	18½"
13	Wheelbase	74¼"
14	Overhang Back	10½"
15	Approach Angle	45°
16	Ramp Angle	36°
17	Departure Angle	45°
18	Forward Tilt	6°
19	Backward Tilt	8°
20	Minimum Outside Radius	91"
21	Capacity	8000 lbs
22	Unladen Weight	14,110 lbs
23	Maximum Ground Speed	9 mph
24	Gradeability	15%
25	3ltr GM LPG / 2.9 TD Deutz	64 HP / 74 HP

Features Include:

- Hydraulic Oil Cooler
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- +/- 4" Side Shift
- Front Rubber Mounted Cabin
- Rear Hydraulic Mounted Cabin

Benefits Include:

- Small Turning Radius
- Operates Indoor and Outdoors
- Reduced Maintenance Costs
- No Mechanical Brakes
- Minimized Tire Spin
- Excellent Visibility from Offset Cab
- Offset Driving Position Gives Excellent View of Poultry Cage

Distributed by:

A	Electrics	12 Volt
B	Fork Section	2" x 5" x 72"
C	27 x 10 - 12 Front Tire	OD 26¾" / Width 10"
D	355 / 65 - 15 Rear Tire	OD 31½" / Width 11½"
E	Standard Color	Green & Gray
F	Suspension Seat	KAB Model 116

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.