

# COMBi-PPT

## Powered Pallet Truck

Equipped with our patented multi-position tiller arm the Combi-PPT offers safer operation, maximum operator visibility and narrow aisle performance.

# COMBiLiFT

## LiFTING INNOVATION



Ride-on Platform  
(Optional)



### Patented Multi-Position Tiller Arm



# COMBi-PPT

## Powered Pallet Truck

With a load capacity of 11,000 lbs @ 27" the Powered Pallet Truck (Combi-PPT) can work in the smallest operating aisles.

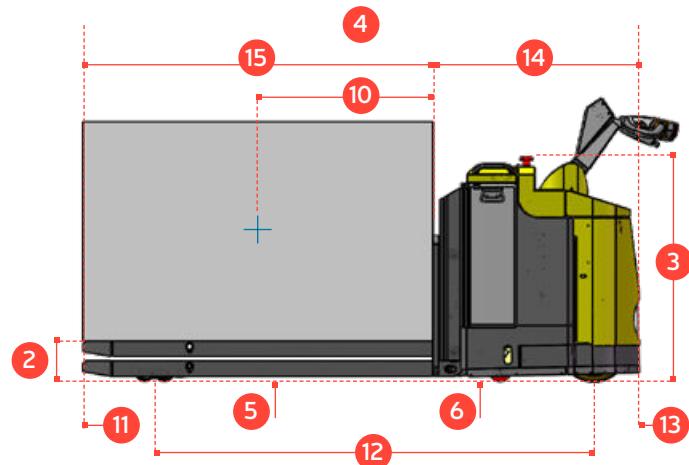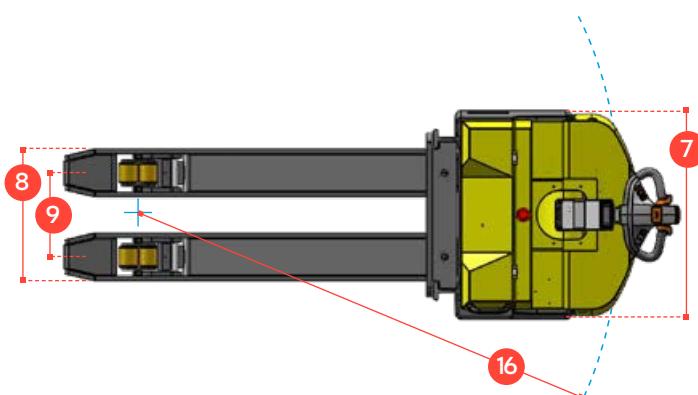

REF.	DESCRIPTION	STANDARD	OPTION
1	Max. Lift Height	3 3/4"	
2	Lowered Height	3 1/2"	
3	Overall Height	42 1/2"	
4	Overall Length	93"	100"
5	Ground Clearance Under Fork	3/4"	
6	Ground Clearance to Centre of Wheelbase	3/4"	
7	Width	36"	
8	Outside Spread of Fork Arms	23" / 49"	
9	Track Front	14 1/2" / 41 1/3"	
10	Load Centre Distance	27"	
11	Overhang Front	13"	
12	Wheelbase	71"	78 1/2"
13	Overhang Back	8 1/2"	
14	Length From Face of Fork	37 1/2"	
15	Platform Length	55"	63"
16	Minimum Outside Radius	79"	86 1/2"

A	Capacity	11,000 lbs
B	Maximum Ground Speed	3 1/2 mph
C	Gradeability	5%
D	Battery Capacity	24 V / 330 Ah
E	Fork Section	2 3/4" x 8 1/4"
F	Front Tyre (Polyurethane)	OD 3 1/4" / Width 3 3/4"
G	Rear Tyre (Vulkollan)	OD 12 1/4" / Width 5"
H	Standard Colour	Yellow & Grey
I	AC Electric Traction Motor	24 V / 5 1/2 HP
J	AC Electric Pump Motor	24 V / 6 1/2 HP

### Without Combi-PPT



### Using Combi-PPT



Standing to the side of the truck eliminates the risk of being trapped or crushed while allowing the Combi - PPT to operate in very narrow aisles.

### Superior safety with Combilift's patented Multi-Position Tiller Arm

The tiller can be turned to the left or right to allow the operator to remain at the side. This enables full visibility of the load and forks, while maintaining full steering control, providing greater awareness of the surroundings for enhanced overall safety.

### Features Include:

- Power Steering
- AC Motor Technology
- Rear Wheel Drive
- Patented Multi-Position Tiller Arm

### Distributed by:

Australian Patent No. 2012389283, Australian Patent No. 2018211281, Brazilian Patent Application No. BR 112015004680-0, Brazilian Patent No. BR 122019000297-5, Canadian Patent No. 2,883,909, Canadian Patent No. 3,027,871, Chilean Patent No. 57219, Chinese Patent No. 2012800761891, Chinese Patent No. 2017110336099, Colombian Patent Application No. 15-69913, European Patent No. 2892841, German Patent No. 60 2010 037 116.6, HK Patent Application No. 15112000.6, Indian Patent No. 359069, Mexican Patent No. 355175, New Zealand Patent No. 706083, Russian Patent No. 2619405, U.S. Patent No. 9,586,797, South African Patent No. 2015/01576.

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.