


COMBi-RT

The Combi-RT forklift is designed for use on rough terrain, catering to your poultry and agri needs.

COMBiLiFT
LiFTING INNOVATION



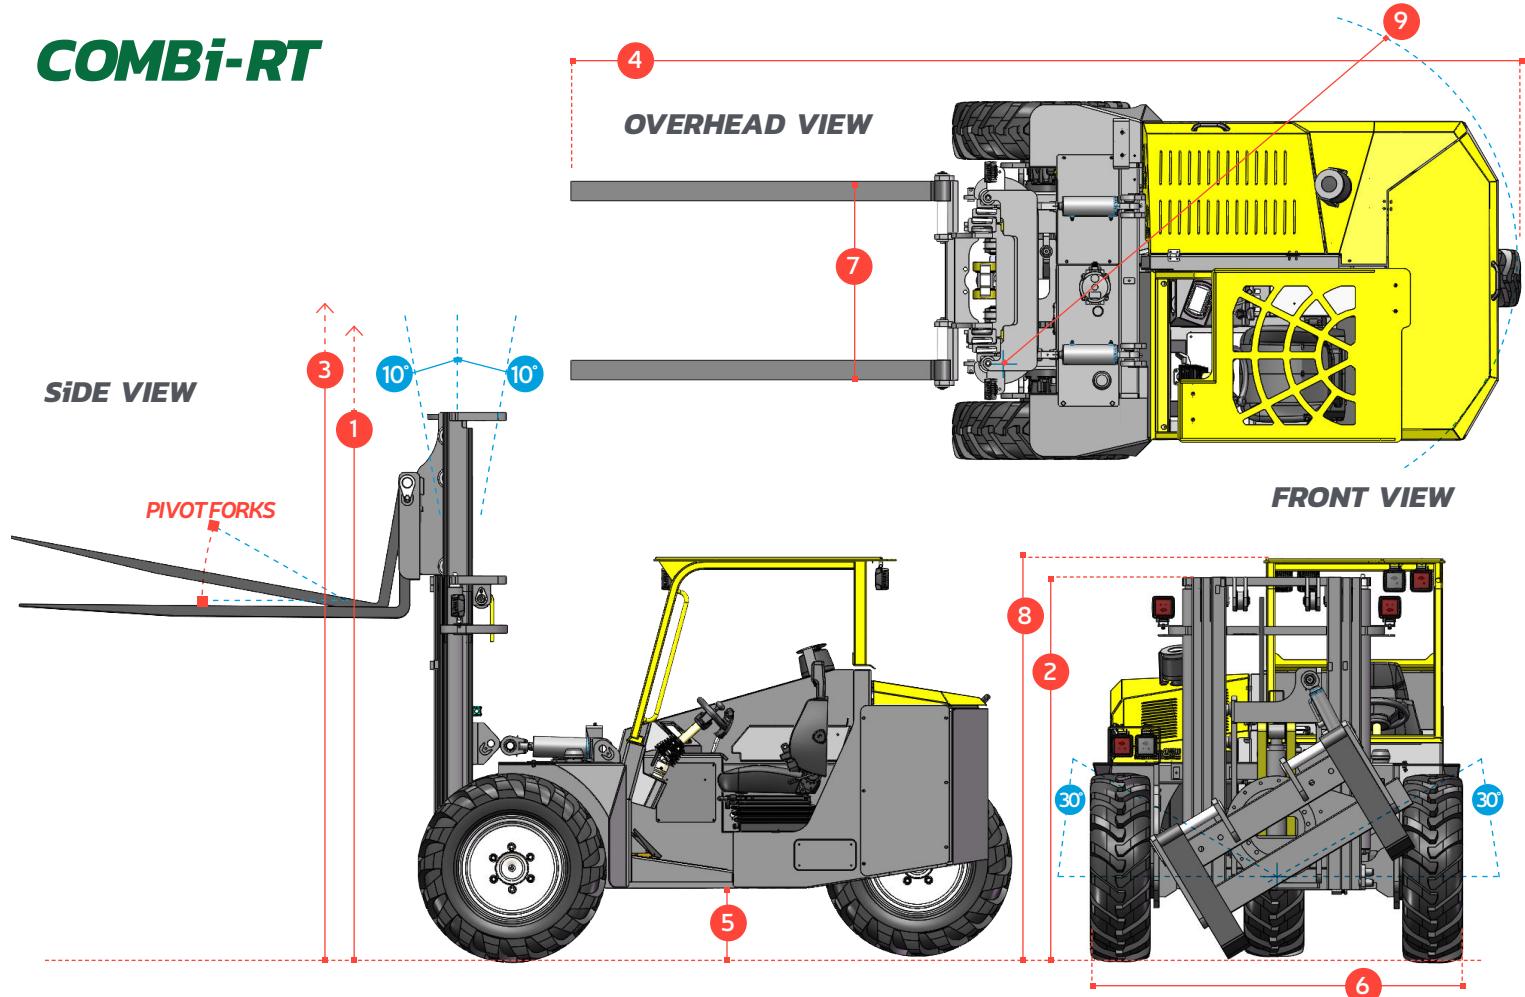

REF.	DESCRIPTION	
1	Max. Lift Height	124"
2	Height Mast Closed	71"
3	Max. (Mast raised)	163"
4	Overall Length	183"
5	Ground Clearance	12"

REF.	DESCRIPTION	
6	Width	79"
7	Outside Spread of Fork Arms	39"
8	Truck Height	74"
9	Turning Radius	92"

DESCRIPTION
Capacity
Unladen Weight
Ground Speed
Gradeability
Deutz 2.9 Diesel Engine
Overall Width
Electrics
Triplex Mast Lift Height
Pivot Fork Section
Fork Rotation
Pneumatic Tractor Grip Tires
Fuel Tank Capacity
Hydraulic Tank Capacity

2.9 TD Deutz
3500 lbs @ 48"
10,250 lbs
11 mph
40%
74 HP
78 $\frac{3}{4}$ "
12 volt
124"
2" x 4" x 72"
30° each way
ø 36" width 11 $\frac{1}{2}$ "
22 Gallons
20 Gallons

Features Include:

- 3 wheel maneuverability
- Hydrostatic all wheel drive
- Large tractor grip tyres
- Deep suspension seat
- Back up alarm
- 150 mm / 6" mast side shift
- Pivot Forks

Benefits:

- Small turning radius
- Reduced maintenance costs
- No mechanical brakes to adjust or replace
- Large ground clearance
- Diff-lock

- Offset driving position gives excellent visibility
- Ergonomically designed cabin for operator comfort

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.