

COMBi-SL

C9,000SL-C12,000SL

The 3 wheel sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBiLiFT

LIFTING INNOVATION





Combi-SR: Rear Mounted Cabin



COMBi-SL

C9,000SL - C12,000SL

SIDE VIEW

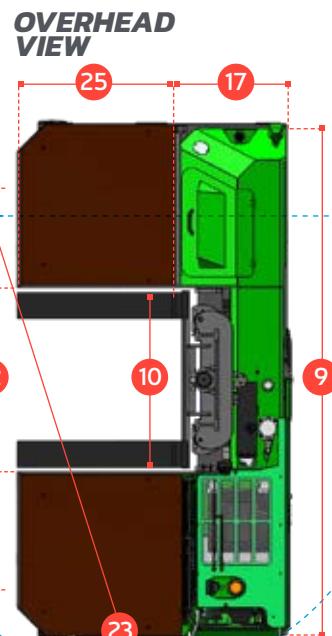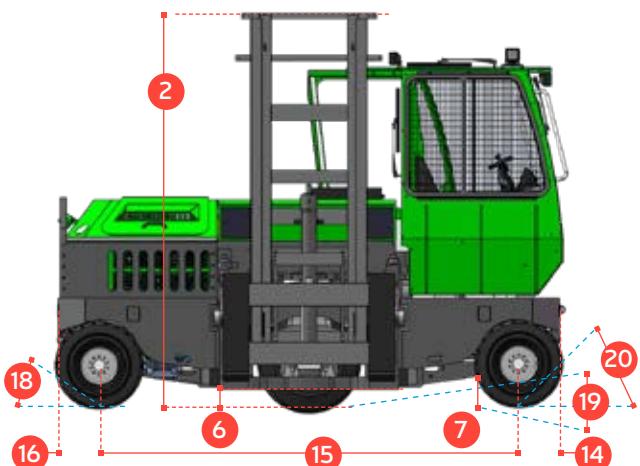

REF.	DESCRIPTION	C9000 SL	C10,000 SL	C12,000 SL
1a	Standard Lift Height		159"	
1b	Free Lift Height		0"	
2	Height Mast Closed		118"	
3	Max. (Mast raised)		204 3/4"	
4	Overall Length	80 3/4"	80 3/4"	88 1/2"
5	Mast Travel	51"	51"	59"
6	Ground Clearance Under Mast		12"	
7	Ground Clearance to Center of Wheelbase		13"	
8	Height Over Cab (Without work lights)		105"	
9	Width		153 1/2"	
10	Outside Spread of Fork Arms		53"	
11	Track Front		128 1/4"	
12	Frame Opening		55"	
13	Load Center Distance		23 1/2"	
14	Overhang Front		12 1/2"	
15	Wheelbase		128 1/4"	
16	Overhang Back		12 1/2"	
17	Length From Face of Fork		33 1/2"	
18	Approach Angle		45°	
19	Ramp Angle		18°	
20	Departure Angle		45°	
21	Forward Tilt		3°	
22	Backward Tilt		5°	
23	Minimum Outside Radius		102"	
24	Platform Height (Optional 750mm)		33 1/2"	
25	Platform Length	47"	47"	55"

Multi-Directional



Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- Load sensing steering
- Hydraulic Oil Cooler
- 4-way lever positioning of Wheels
- 3 Wheel Hydrostatic Drive

Distributed by:

A	Capacity	9000 lbs	10,000 lbs	12,000 lbs
B	Unladen Weight	21,650 lbs	21,825 lbs	22,490 lbs
C	Maximum Ground Speed		12 mph	
D	Gradeability		15%	
E	Deutz TCD 3.6 ltr / 4.3 ltr GM LPG		74 HP / 96 HP	
F	Electrics		12 Volt	
G	Fork Section 2" x 8" x	47"	47"	55"
H	27 x 10 - 12 Front Tire		OD 27" / Width 10"	
I	355 / 65 - 15 Rear Tire		OD 31" / Width 11 1/2"	
J	Standard Color		Green & Gray	
K	Suspension Seat		KAB Model 116	

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.