


# **COMBi-ST** **6000-8000**

The multi-directional, stand-on forklift designed for the safe, space saving and productive handling of long and bulky loads.

# **COMBiLiFT**


**LIFTING INNOVATION**

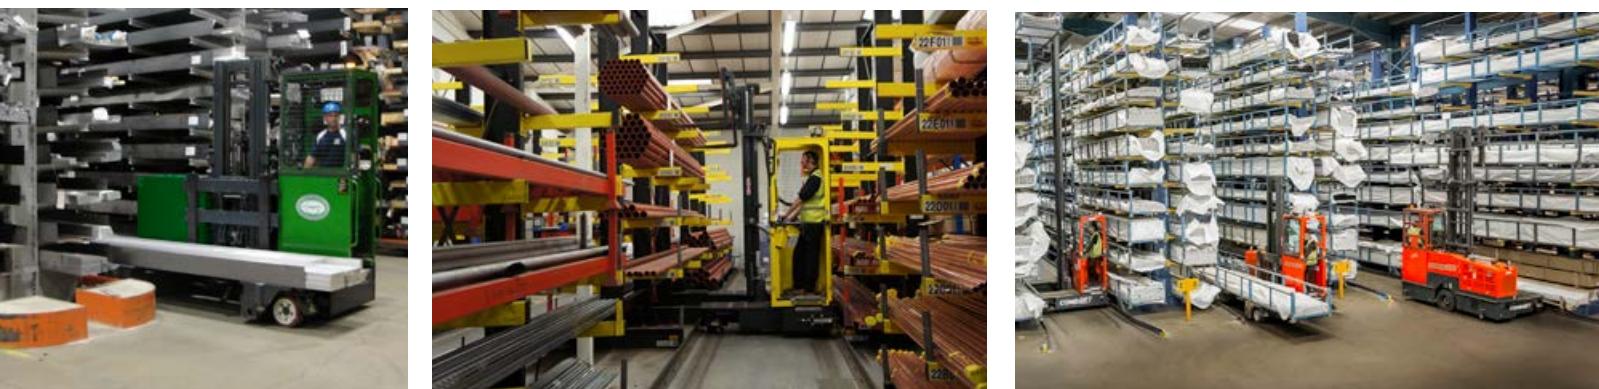



# COMBi-ST

## 6000-8000

### FRONTAL MODE

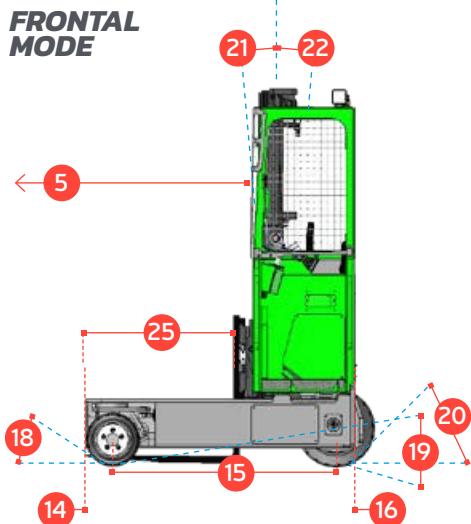


### SIDEWARD MODE

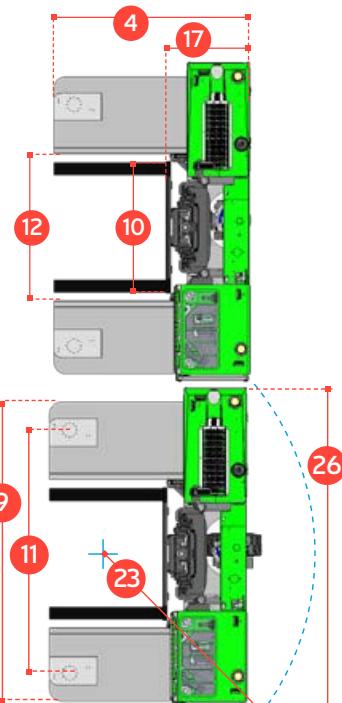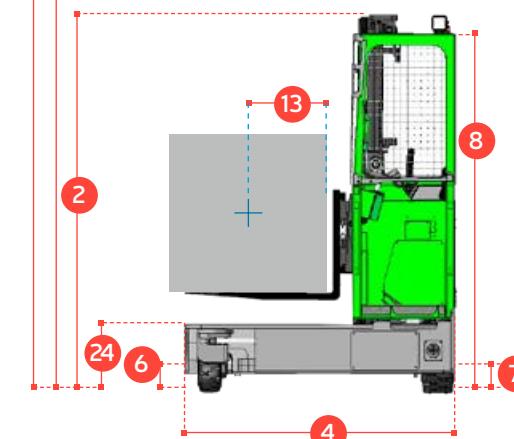

REF.	DESCRIPTION	C6000 ST	C8000 ST
1a	Standard Lift Height	159"	
1b	Free Lift Height	0"	
2	Height Mast Closed	111½"	132"
3	Max. (Mast raised)	204¼"	
4	Overall Length	78¾"	82½"
5	Mast Travel	51"	
6	Ground Clearance Under Mast	9"	
7	Ground Clearance to Center of Wheelbase	5"	
8	Height Over Cab (without work lights)	104¾"	
9	Platform Width	120"	
10	Outside Spread of Fork Arms	53"	
11	Track Front	97¼"	
12	Frame Opening	59"	
13	Load Center Distance	24"	
14	Overhang Front	8"	
15	Wheelbase	65½"	69¼"
16	Overhang Back	5¼"	
17	Length From Face of Fork	31½"	35½"
18	Approach Angle	45°	
19	Ramp Angle	17°	
20	Departure Angle	45°	
21	Forward Tilt	3°	
22	Backward Tilt	4°	
23	Minimum Outside Radius	95¼"	
24	Platform Height	19 ½"	
25	Platform Length	47¼"	
26	Overall Width	126"	

### Multi-Directional

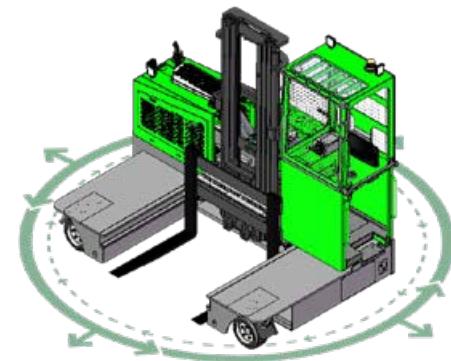

### Features Include:

- Rubber Mounted Cabin
- Multi-directional Operation
- Load Sensing Steering
- 2 wheel Hydrostatic Drive
- 4-way Lever Positioning of Wheels
- Stand-up Operator

A	Capacity	6,000 lbs	8,000 lbs
B	Unladen Weight	13,200 lbs	14,330 lbs
C	Maximum Ground Speed	6 mph	
D	Gradeability	10%	
E	LPG GM (PSI) Engine, 3.0L	74 HP	
F	Fork Section	2" x 5" x 47¼"	2" x 6" x 47¼"
G	16 x 7 – 10.5 Front Tire (Solid)	OD 16" / Width 7"	
H	23 x 10 – 12 Rear Tire (Super Elastic)	OD 22¾" / Width 9½"	
I	Standard Color	Green & Gray	

### Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.