



COMBILIFT



C10000 SL

Customised Handling Solutions

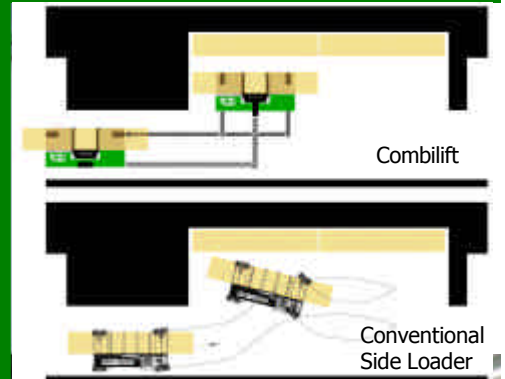


www.COMBiLiFT.COM

two machines in one

"counterbalance forklift; side loader"

Specifications Model C10,000 SL


Ref.	Description	C10,000 SL
1 a	Max. Lift Height	159"
1 b	Free Lift Height	0"
2	Height Mast Closed	118"
3	Max. (Mast raised)	204 3/4"
4	Overall Length	80 3/4" / 88 1/2"
5	Mast Travel	57"
6	Ground Clearance Under Mast	11 3/4"
7	Ground Clearance to Wheelbase Centre	7 1/4"
8	Height Over Cab or of Overhead Guard	101 1/4"
9	Width	153 1/2"
10	Outside Spread of Fork Arms	53"
11	Track Front	128 1/4"
12	Frame Opening	55"
13	Load Centre Distance	23 1/2"
14	Overhang Front	10 3/4"
15	Wheel Base	65 1/4" / 73"
16	Overhang Back	5"
17	Length From Face of Fork	33 1/2"
18	Approach Angle	45°
19	Ramp Angle	18°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	102"
24	Platform Height	29 1/2"
25	Platform Length	47 1/2" / 55"
A	Capacity	10,000 lbs
B	Unladen Weight	20,000 lbs
C	Maximum Ground Speed	12 1/2 mph
D	Gradability	15%
E	V2003 T Kubota Diesel / 3 ltr. GM LPG	83HP/ 97 HP
F	Electric's	12 Volt
G	Fork Section 2" x 6" x	47 1/2"
H	23 x 10 - 12 Front Tyre	23" / 9 1/2"
I	28 x 12.5 - 15 Rear Tyre	28" / 11 1/2"
J	Standard Colour	Green and Grey
K	Suspension Seat	KAB Model 211

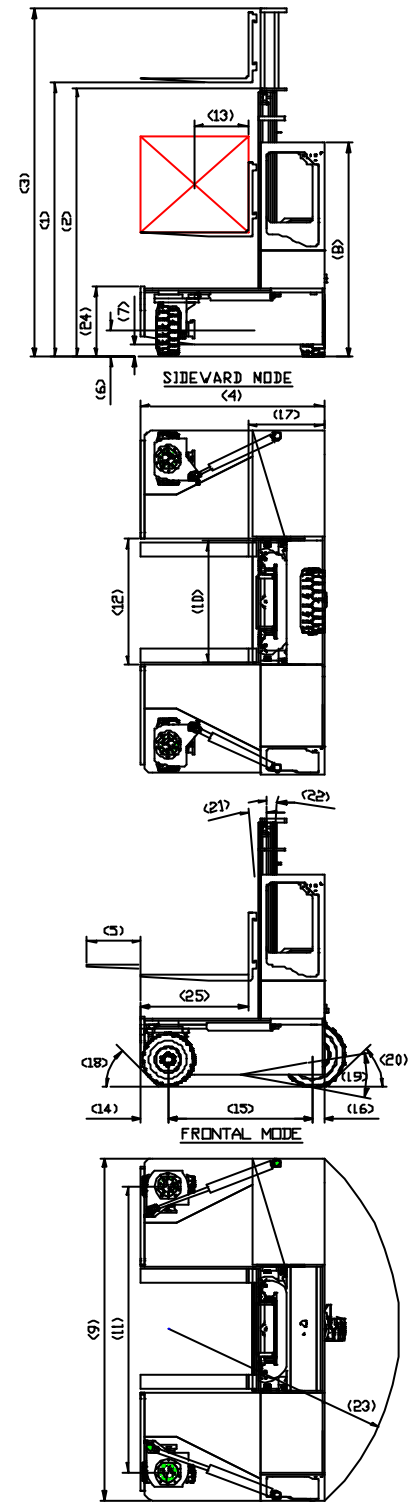

Features Include:

- Rubber Mounted Half Cabin with Top, Front, Side, and Rear Glass
- Multi - Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 way lever Positioning of Wheels

Mast Specifications

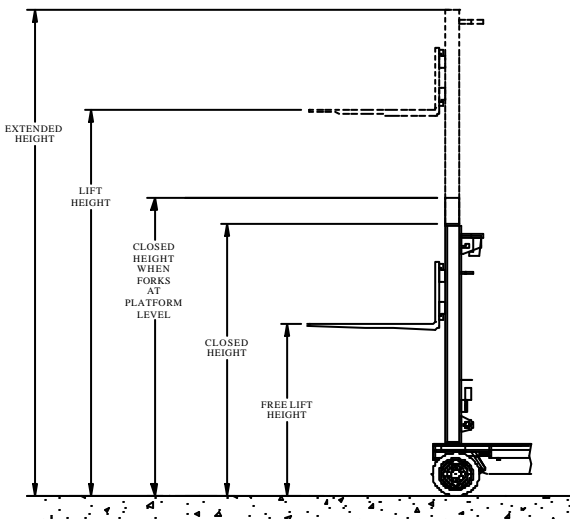

MAST TYPE	LIFT HEIGHT	CLOSED HEIGHT	CLOSED HEIGHT AT PLATFORM LEVEL	FREE-LIFT HEIGHT	EXTENDED HEIGHT
Duplex	159"	118"	133"	-	201"
Duplex & Freelif	159"	118"	118"	71"	201"
Duplex	178"	128"	142"	-	220"
Duplex & Freelif	178"	128"	128"	80"	220"
Duplex	192"	135"	149"	-	233"
Duplex & Freelif	192"	135"	135"	87"	233"

Combilift Ltd
 Clontibret, Co. Monaghan, Ireland
 Tel. 011 353 47 80500 Fax. 011 353 47 80501
www.combilift.com info@combilift.com